


Mounting Adapter (#11327-D)

Will fit a sink opening of: 6" I.D. and 6-1/2" O.D.

Installation

1. Place mounting flange (1) up over the existing sink bowl connection lip. It may require a slight force fit. Do not use existing LOOSE RING.
2. Push mounting flange (1) up out of the way and fit the mounting gasket (2) onto the sink bowl connection lip.
3. Move mounting flange (1) down over mounting gasket (2). Ensure that the threaded fasteners in the mounting flange fit into the recesses in the top of the mounting gasket.
4. Attach two screws (5) through opposite holes in the flat gasket (4), support ring (3), mounting gasket (2), and into the threaded fasteners in the mounting flange (1). The screws should protrude approximately 1/4 inch below the flat gasket.
5. Position the disposer beneath the flat gasket (4) and engage the two protruding screws in the keyhole slots of the disposer body flange. Install the remaining four screws (5) and turn the disposer into place for plumbing connections. Tighten all screws evenly to secure the unit.

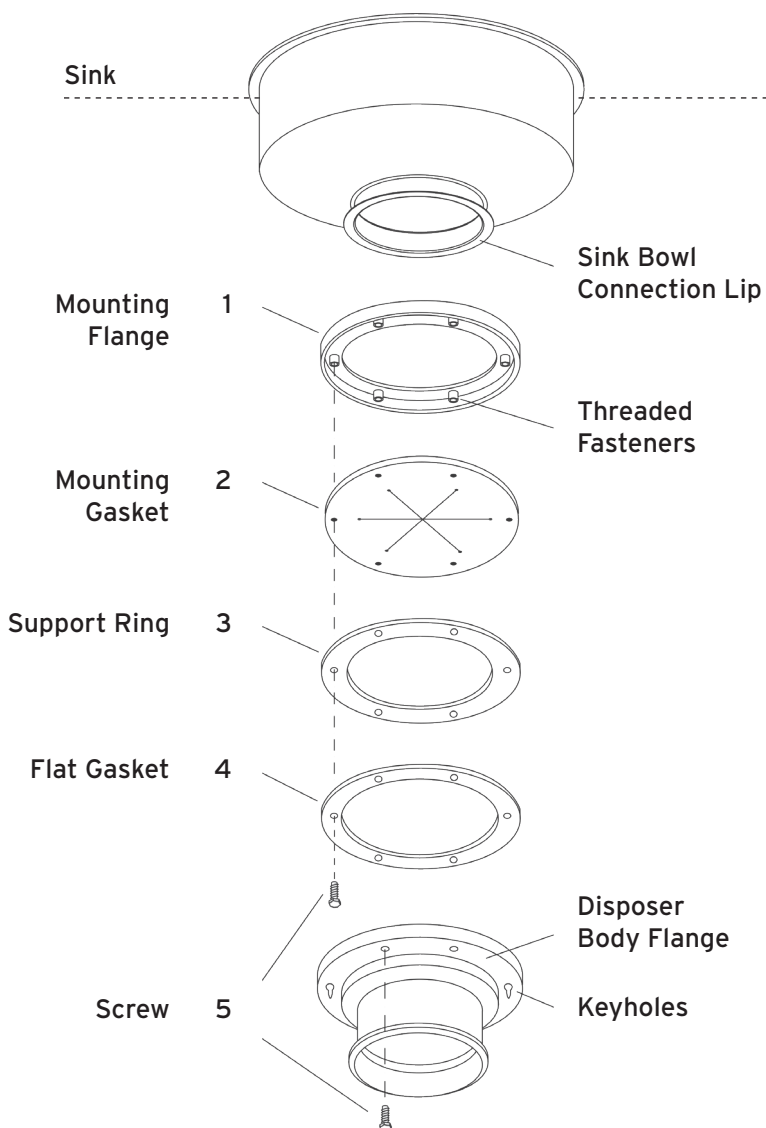

PARTS

- | | |
|------------------------------|------------------------|
| 1 Mounting Flange (#11004-B) | 4 Flat Gasket (#11292) |
| 2 Mounting Gasket (#11342) | 5 Screw (#1491) |
| 3 Support Ring (#14726) | |