


Mounting Adapter (#11599-A)

Will fit a sink opening of: 7" I.D. and 7-3/4" O.D.

Installation

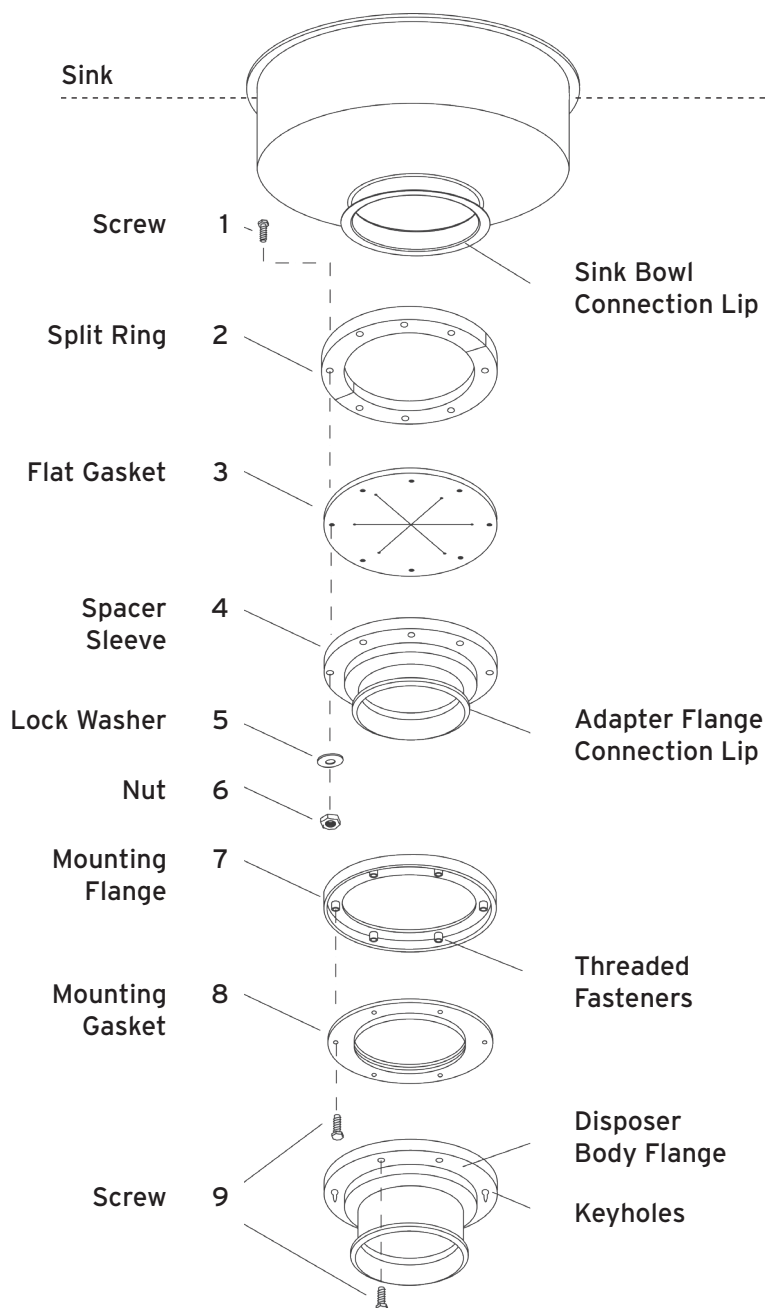

1. Place the split ring (2) around the sink bowl connection neck (located just above the sink bowl connection lip). Insert ten screws (1) through the split ring, flat gasket (3), and spacer sleeve (4). With screws protruding through the spacer sleeve, attach ten lock washers (5) and ten nuts (6). Tighten all screws evenly.
2. Place mounting flange (7) over the spacer sleeve connection lip (4). Push mounting flange up out of the way and fit the inside groove of the mounting gasket (8) onto the spacer sleeve connection lip.
3. Move mounting flange (7) down over mounting gasket (8). Ensure that the threaded fasteners in the mounting flange fit into the recesses in the top of the mounting gasket.
4. Attach two screws (9) through opposite holes in the mounting gasket (8) and into the threaded fasteners in the mounting flange (7). The screws should protrude approximately 1/4 inch below the mounting gasket.
5. Position the disposer beneath the mounting gasket (8) and engage the two protruding screws in the keyhole slots of the disposer body flange. Install the remaining four screws (9) and turn the disposer into place for plumbing connections. Tighten all screws evenly to secure the unit.

PARTS

1 Screw (#1491)	6 Nut (#11179)
2 Split Ring (#14720)	7 Mounting Flange (#11004-C)
3 Flat Gasket (#12614)	8 Mounting Gasket (#11341)
4 Spacer Sleeve (#12664-A)	9 Screw (#1491)
5 Lock Washer (#11444)	