


Mounting Adapter (#11599-B)

Will fit a sink opening of: 7" I.D. and 8 1/2 " O.D. with 8 1/16" bolt hole circle (10 bolts)

Installation

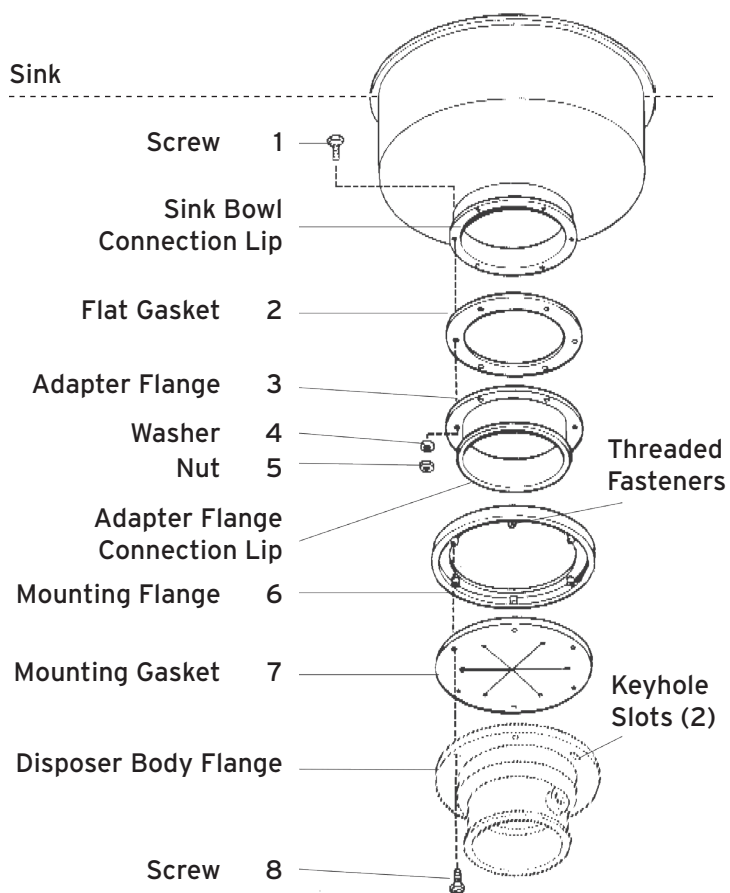

1. Place flat gasket (2) on the sink bowl connection lip. Insert screws (1) through the sink bowl connection lip, flat gasket, and adapter flange (3). With screws protruding through the adapter flange, attach washers (4) and nuts (5). Tighten all screws evenly.
2. Place mounting flange (6) over adapter flange connection lip (3). Push mounting flange up out of the way and fit inside groove of mounting gasket (7) onto the adapter flange connection lip.
3. Move mounting flange (6) down over mounting gasket (7). Be certain that the threaded fasteners in the mounting flange fit into recesses in the top of the mounting gasket.
4. Attach two screws (8) through opposite holes in the mounting gasket (7), and into the threaded fasteners in the mounting flange (6). The screws should be protruding approximately 1/4 inch below the mounting gasket.
5. Position the disposer beneath the mounting gasket (7) and engage the two protruding screws in the keyhole slots in the disposer body flange. Assemble the remaining screws (8) and turn the disposer into place for plumbing connections. Tighten all screws evenly to secure the unit.

PARTS

1 Screw (#1468)	5 Nut (#11179)
2 Flat Gasket (#12614)	6 Mounting Flange (#11004-C)
3 Adapter Flange (#12664-A)	7 Mounting Gasket (#11341)
4 Washer (#11444)	8 Screw (#1491)