


Mounting Adapter (#11599-K)

Will fit a sink opening of: 8" I.D. and NO Flange

Installation (Support Legs Required)

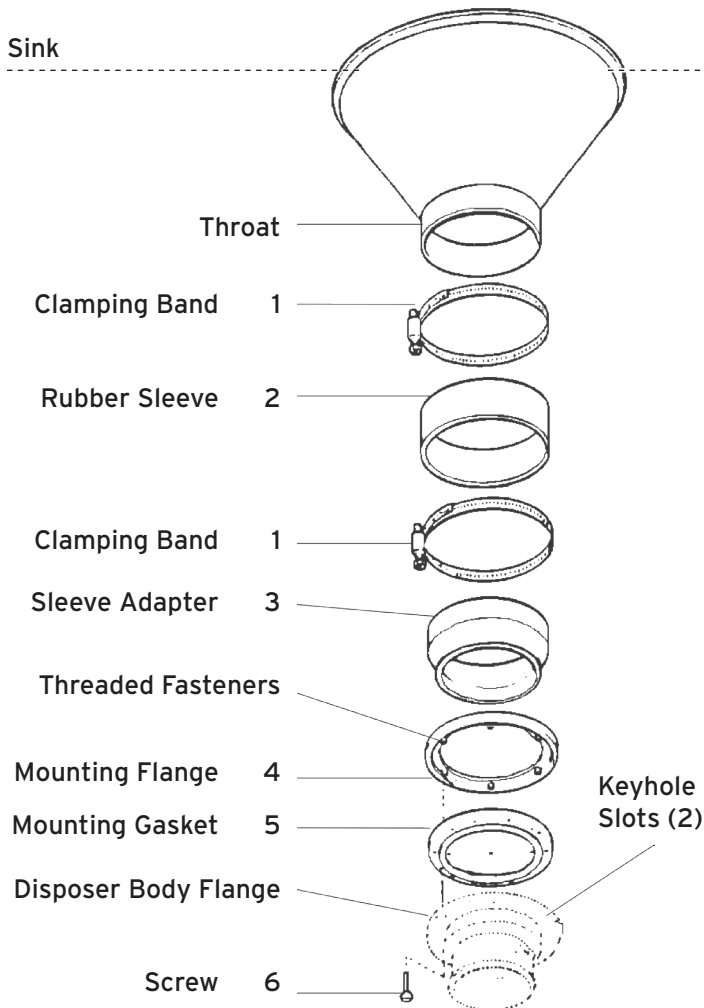

1. Assemble the rubber sleeve (2) to the throat of the sink bowl with one of the clamping bands (1).
2. Insert the lip of the sleeve adapter (3) through the mounting flange (4) and into the groove of the mounting gasket (5).
3. Place the sleeve adapter (3), mounting gasket (5) and mounting flange assembly on the top of the disposer body flange. Be certain that the threaded fasteners in the mounting flange (4) fit into the recesses in the top of the mounting gasket.
4. Fasten screws (6) through holes in disposer body flange, mounting gasket (5) and into the threaded fasteners in the mounting flange (4). Tighten screws evenly.
5. Position the disposer under the rubber sleeve (3). Extend the adjustable legs of the disposer to provide support from the floor.

NOTE: Disposers from 3 H.P. through 10 H.P. have factory assembled legs.

Disposers from 1/2 H.P. through 2 H.P. require two accessory legs.

6. Turn the disposer into position for plumbing connections. Slide the sleeve adapter (3) into the bottom of the rubber sleeve (2) and tighten with the other clamping band (1). Adjust the support legs for final positioning.

PARTS

- | | |
|----------------------------|------------------------------|
| 1 Clamping Band (#13119) | 4 Mounting Flange (#11004-C) |
| 2 Rubber Sleeve (#13120-A) | 5 Mounting Gasket (#11341) |
| 3 Sleeve Adapter (#13118) | 6 Screw (#1491) |